

HSP1X4-2.0-4K

1 in 4 out HDMI Splitter Supporting 4Kx2K@60Hz (UHD)



The 4K HDMI Splitter has 1 input and 4 outputs. It distributes 1 HDMI source to 4 HDMI displays simultaneously. The HDMI Splitter offers solutions for HDTV retail showrooms, data control centers, information distribution, conference room presentation, schools, and corporate training environments

Features:

- Easy to Use: Plug n Play
- 1 In 4 out HDMI splitter
- Supports HDMI 2.0 and HDCP 2.2
- Video Support up to 4Kx2K/60Hz
- Standard audio, DSD and HD audio



Panel View:

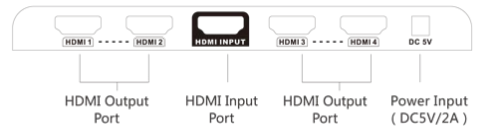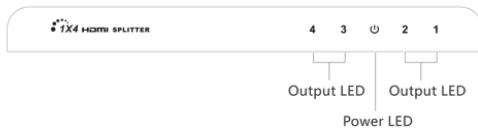

Package Includes:

- 1X4 HDMI Splitter x 1 piece
- Power adapter x 1 piece
- Instructions

Connection:

- Connect the HDMI video source output to the splitter HDMI input port by HDMI cable
- Connect the splitter output port by HDMI cable to the TV's
- Set TV's to correct HDMI input
- Plug power supply into wall outlet then into 1x4 HDMI splitter. Power indicator light should be on now.

Specifications:

Model:	HSP1X4-2.0-4K
Input Video Signal	0.5-1.5 volts p-p
Input DDC Signal	5 volts p-p (TTL)
Resolution Supported	Up to 4Kx2K @60Hz (UHD)
Video Format Supported	480i/480p/756i/756p/720p/1080i/1080p/4Kx2K@24/25/30/60Hz
Audio Supported	Supports standard audio and DSD (Direct Stream Digital) and HD (HBR) audio
ESD	± 8kV (air-gap discharge) ± 4kV (contact discharge)
Power Supply	DC 5V 2A
Power Consumption	<8W
Temperature	Operation: 32 to 140°F, Storage: -4 to 158°F, RH 20 ~ 90%
Dimensions – Inches	6.22”(l) 3.14”(w) .67”(h)
Weight – lbs.	.43



Do you Need Technical Support?

ZUUM is proud to offer free technical support to ensure your product is operating correctly.

If you are experiencing difficulties setting up this product, please call us for assistance 1-888-861-7351 or visit www.zuum.life

Here for You 24/7