

## HSP1X4-4K

### HDMI 1 In 4 Out 4K Distribution Amplifier (3D)

The 4K HDMI Splitter has 1 input and 4 outputs. It distributes 1 HDMI source to 4 HDMI displays simultaneously. The HDMI Splitter offers solutions for HDTV retail showrooms, data control centers, information distribution, conference room presentation, schools, and corporate training environments.


#### Features:

- Easy to Use: Install in seconds, no settings needed
- Supports HDCP 1.4, 3D, and Deep Color
- Video Bandwidth up to 10.2Gbps
- Supports resolution up to 4K X 2K @30Hz
- Auto EDID learning, copy or manual set modes
- Surround Sound up to 7.1 or stereo digital audio

#### Package Includes:

HSP1X4-4K x 1 piece  
Power adapter x 1 piece  
Instructions

#### Installation View:

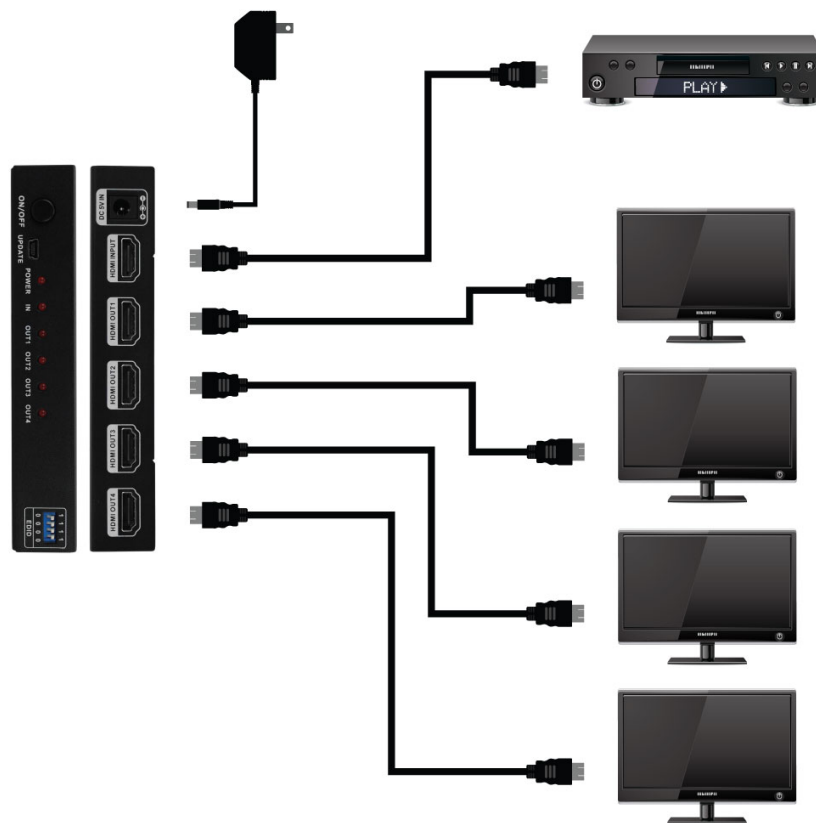

#### Connecting Auto Mode: (NOTE: Use when TV's have same resolution capability)

- Step 1: Make sure EDID dip switches on front panel are all set (1111).
- Step 2: Make sure all devices powered off.
- Step 3: Connect HDMI input and the HDMI outputs to the splitter, source and TV's. (NOTE: Place lowest resolution capable TV into output 1 and set EDID to (0000) to copy output 1 and use for all TV's if different)
- Step 4: Plug power into HDMI splitter then power source and TV's. (Note: If HDMI splitter reads a TV with max 1080p output first and you have a second TV attached that is 4K capable your max picture resolution will be 1080p).

**EDID Selector Options: (NOTE: Use when one TV has lower resolution ability than the others)**

Position	EDID Description
0 0 0 0	Copy EDID from HDMI Out1
0 0 0 1	1080p, 2CH Audio
0 0 1 0	1080p, Dolby/DTS 5.1
0 0 1 1	1080p, HD Audio
0 1 0 0	1080i, 2CH Audio
0 1 0 1	1080i, Dolby/DTS 5.1
0 1 1 0	1080i, HD Audio
0 1 1 1	3D, 1080p, 2CH Audio
1 0 0 0	3D, 1080p, Dolby/DTS 5.1
1 0 0 1	3D, 1080p, HD Audio
1 0 1 0	4Kx2K, 2CH Audio
1 0 1 1	4Kx2K, Dolby/DTS 5.1
1 1 0 0	4Kx2K, HD Audio
1 1 0 1	1080p, 2CH Audio
1 1 1 0	1080p, 2CH Audio
1 1 1 1	Auto Compare HDMI out EDID

**Specification:**

Model:	HSP1X4-4K
Input Video Signal	0.5-1.0 volts p-p
Input DDC Signal	5 volts p-p (TTL)
Resolution Supported	Up to 4K X 2K @30Hz
Video Format Supported	480i/480p/720p/1080i/1080p (3D)/4Kx2K @30Hz
Video Bandwidth	Up to 10.2Gbps
ESD	± 8kV (air-gap discharge) ± 4kV (contact discharge)
Power Supply	DC 5V 1A
Temperature	Operation: 32 to 104°F, Storage: -4 to 140°F, RH 20 ~ 90%
Dimensions – Inches	5.70”(w) .98”(h) 2.76”(d)
Weight – lbs.	.66



**Do you Need Technical Support?**

ZUUM is proud to offer free technical support to ensure your product is operating correctly. If you are experiencing difficulties setting up this product, please call us for assistance 1-888-861-7351 or visit [www.zuum.life](http://www.zuum.life)  
**Here for You 24/7**