

LSX8CHV1-4K

8 Channel Penta-brid 4K Compact 1U XVR



The Device features powerful digital monitoring capability for the security industry. The embedded LINUX OS assures the stable operation, high accessibility and delivers unmatched monitoring with easy to use configurations. The Device features functions such as recording, playback, and monitoring and offers synchronization for audio and video. The Device also adopts the advanced control technology and has a strong network data transmission capability.

Series Overview

The Device harnesses its embedded design to ensure high security and reliability. It can work from the local end or, through its strong networking capability, connect to the professional surveillance software to form a security network, displaying its powerful remote monitoring functions. Also, it can upgrade the old system for fine definition without changing the initial circuit.

Functions

GUI4.0

Brand new local and web UI style.

Zero-channel Encoding

Uses zero-channel encoding to blend multiple analog and IP channels into one channel. Enjoy monitoring through remote multi-window live view and save on networking transmission bandwidth.

Recording

Features several types of playback, including simultaneous, event, tag, smart, image, fast and slow playback.

HDCVI/AHD/TVI/CVBS Auto-detect

HDCVI/AHD/TVI/CVBS Auto-detect

The XVR can auto recognize the signal of front-camera without any setting. It makes operation more friendly and convenient.

Coaxial Audio/Upgrade/Alarm

- H.264/H264+dual-stream video compression
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- Max. 12 channels IP camera inputs, each channel up to 8 MP
- Max. 48 Mbps incoming bandwidth
- Supports 5 MP camera input
- Supports simultaneous display of VGA and HDMI
- Supports 1 SATA HDD, up to 8 TB
- Smart Search and Intelligent Video System

The integrated design can reduce wiring troubles which makes it much more cost-effective and convenient for installation.

Long Distance Transmission

The HDCVI system supports long distance transmission over coaxial cable and UTP, max. 300 m for 1080p and 500 m for 720p.

Intelligent Video System (IVS)

With built-in intelligent video analytics, the XVR has the ability to detect and analyze moving objects for improved video surveillance. The XVR provides optional standard intelligence at the edge allowing detection of multiple object behaviors such as abandoned or missing objects. IVS also supports Tripwire analytics, allowing the camera to detect when a pre-determined line has been crossed.

Face Detection

It is a typical technology being used in a variety of applications for searching or identification of individuals.

Spot Output

It is made for a secondary monitor. This allows the operator to view one special monitor that assigned to selected cameras or video inputs from higher security areas.

Technical Specification

System

Main Processor	Embedded processor
Operating System	Embedded linux

Face Detection

Face Detection	only for the 1st channel,only support analog camera
----------------	---

IVS Analytics

IVS	1 channel, 10 IVS for each channel, only support analog camera
-----	--

Audio and Video

Analog Camera Input	8 channels, BNC
HDCVI Camera Input	4K; 6 MP; 5 MP; 4 MP; 3 MP; 1080p; 720p
AHD Camera Input	4K; 6 MP; 5 MP; 4 MP; 3 MP; 1080p; 720p
TVI Camera Input	4K; 6 MP; 5 MP; 4 MP; 3 MP; 1080p; 720p
CVBS Camera Input	PAL/NTSC
IP Camera Input	8+4 channels, each channel up to 8 MP
Audio Input	1 RCA
Audio Output	1 RCA
Two-way Talk	Reuse audio in/out, RCA

Recording

Video Compression	H.264+/H.264
Resolution	4K, 6 MP, 5 MP, 4 MP, 3 MP, 1080p, 720p, 960H, D1, CIF, BCIF, QCIF
Record Rate	Main stream: All channel 4K (1 fps~7 fps); 6 MP(1 fps~10 fps); 5 MP(1 fps~12 fps); 4 MP/3 MP(1 fps~15 fps);/1080p/720p/960H/D1/CIF (1 fps~25/30 fps); Sub steram: 960H(1 fps~15 fps); 1/CIF(1 fps~25/30 fps)
Record Mode	Manual, Schedule (General, Continuous), MD (Video detection: Motion Detection, Video Loss, Tampering), Alarm, Stop
Bit Rate	32 Kbps~6144 Kbps Per Channel
Audio Sample Rate	8 KHz, 16 bit Per Channel
Audio Bit Rate	64 Kbps Per Channel
Audio Compression	G.711A; G.711U; PCM

Display

interface	1 HDMI, 1 VGA
Resolution	HDMI: 3840 x 2160, 2560 x 1440, 1920 x 1080, 1280 x 1024, 1280 x 720 VGA: 1920 x 1080, 1280 x 1024, 1280 x 720
Multi-screen Display	When IP extension mode enabled: 1/4/8/9/16 When IP extension mode not enabled: 1/4/8/9
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording

Network

Network Port	1 RJ-45 Port (1000 MB)
Network Protocol	HTTP, HTTPS, TCP/IP, IPv4/IPv6, Wi-Fi, SNMP, UPnP, RTSP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, Alarm Server, IP Search (Supports Dahua IP camera, DVR, NVS, etc.)

Max User Access	128 users
Mobile Phone Access	iOS, Android
Interoperability	ONVIF (profile S), CGI, SDK

Alarm

General Alarm	Motion detection, Video Loss, tampering
Anomaly Alarm	No disk, disk error, low space, offline, ip conflict, MAC conflict
Intelligent Alarm	Face detection, IVS
Alarm Linkage	Record, snapshot (panoramic), IPC external alarm output, access controller, voice prompt, buzzer, log, preset, email

Playback and Backup

Playback	1/4/9
Search Mode	Time /Date, Alarm, MD and Exact Search (accurate to second)
Playback Mode	Instant playback, general playback, event playback, tag playback, smart playback (face and motion detection)
Backup	USB Device/Network

Storage

HDD Interface	1 SATA port, up to 8 TB capacity
eSATA	N/A

Auxiliary Interface

USB	2 USB ports (1 USB 2.0,1 USB 3.0)
RS-485	1 port, for PTZ control

Electrical

Power Supply	12 VDC/2A
Power Consumption (Without HDD)	≤ 10 W

Construction

Dimensions	Compact 1U, 260 mm × 220 mm × 44 mm (10.24" × 9.34" × 1.87")
Net Weight(without HDD)	≤ 1.1 kg (2.43 lb)
Installation	Desktop installation

Environmental

Operating Temperature	-10 °C to +55 °C (+14 °F to +131 °F)
Operating Humidity	10%~90%


Third-party Support

Third-party Support	Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dahua, Dynacolor, Honeywell, Panasonic, Pelco, Samsung,
---------------------	--


Certifications

Certifications	CE: CE LVD EN 62368 CE EMC: EN55032 EN55024 EN55035,EN50130-4 FCC: part15B
----------------	--

Dimensions (mm[inch])

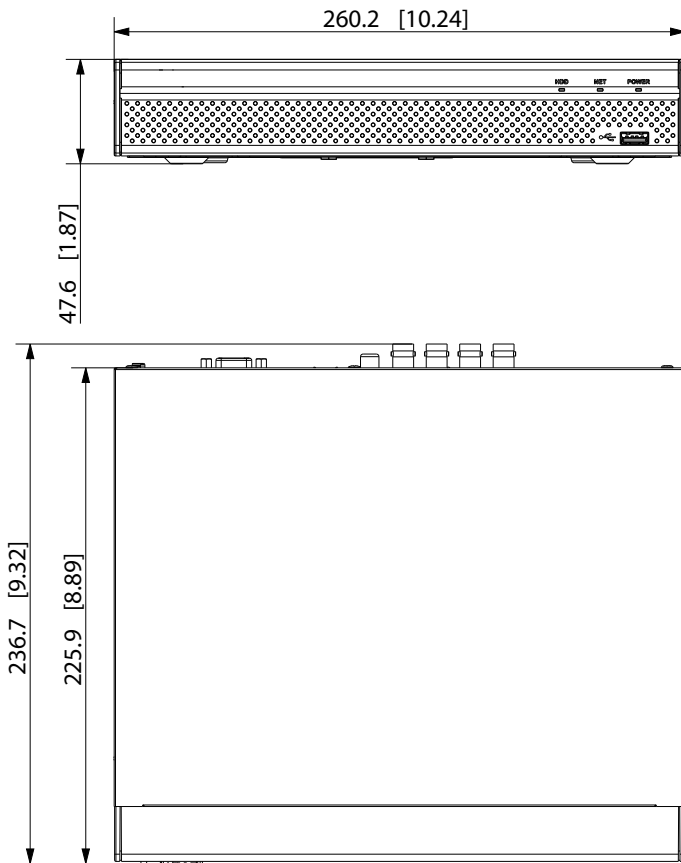

Panels

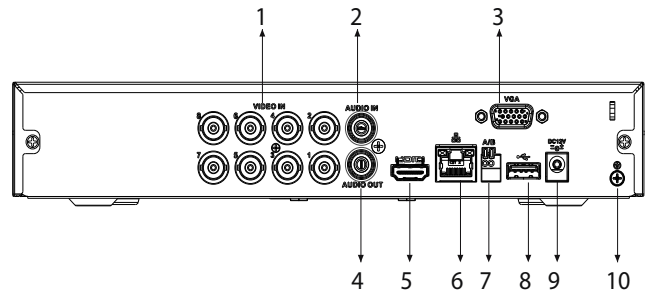

- | | |
|---------------|----------------------------|
| 1 VIDEO IN | 2 AUDIO IN, RCA Connector |
| 3 VGA Port | 4 AUDIO OUT, RCA Connector |
| 5 HDMI Port | 6 Network Port |
| 7 RS-485 Port | 8 USB Port |
| 9 Power Input | 10 Ground |