
ZT-QS400-TX

ZT-527 | Zenty QuickShare Dual Screen 4K60 Wireless Presentation System (Transmitter) - QS400-TX only

Scan to visit product page

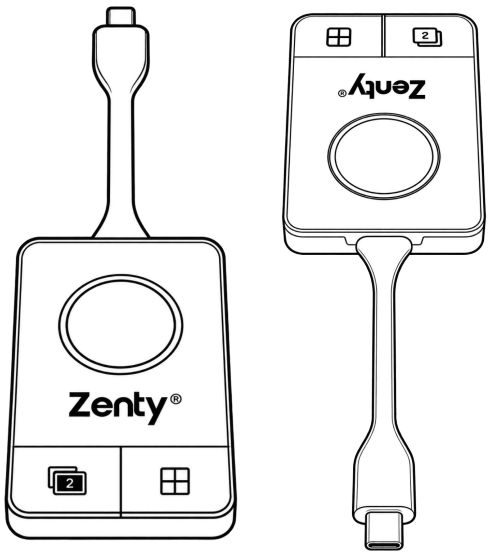

ZT-QS400-TX • Front / Rear View

Product Description:

The 4K 60Hz QuickShare Dual-Screen Wireless Presentation System - QS400 delivers app-free, cable-free content sharing in up to 3840 × 2160 resolution at 60Hz. Designed for conference rooms, huddle spaces, lecture halls, hybrid classrooms, training rooms, and professional AV installations, it supports dual-screen workflows that display shared content on one screen while showing video conferencing, camera feeds, reference materials, or student content on another. Up to 22 presenters can connect, with content from up to four users displayed simultaneously, and the meeting host can select a specific transmitter directly from the receiver's touchscreen. With approximately 100 ms latency, 5GHz IEEE 802.11ac wireless connectivity, AES 128-bit encryption, stereo audio, up to 30 m line-of-sight range, and PoE-capable receiver connectivity, the QS400 provides secure and flexible collaboration for modern meeting and learning environments.

Key Features:

- 4K60 wireless presentation system with HDMI 2.0 receiver output up to 3840x2160 at 60Hz, ideal for conference rooms, huddle spaces, classrooms, training rooms, and professional AV installations

Key Features (cont.):

- Present wirelessly from laptops and compatible smart devices without installing software or connecting cables, reducing setup time and IT support requirements
- Display shared presentation content on one screen while showing video conferencing, camera feeds, reference materials, or student content on a second screen
- Connect up to 22 presenters and display content from up to four users simultaneously. The host can select a specific transmitter directly from the receiver's touchscreen
- Features approximately 100 ms latency, 5GHz IEEE 802.11ac wireless, AES 128-bit encryption, stereo audio, up to 30 m line-of-sight range, and PoE-capable receiver connectivity

In the Box:

1 x Receiver

1 x Power Cable

Specifications

VIDEO	
Color space / chroma subsampling	YCbCr 4:4:4, RGB 4:4:4
Colorimetry	Rec.709
Deep color	8-bit per channel (24-bit total)
HDCP	HDCP 1.4
Supported resolutions	1080p@24/30/60Hz, 4K@30Hz

CONNECTIVITY & I/O	
Input ports	1x USB-C
Output ports	Wireless to the ZT-526 receiver
USB interface	USB-C

WIRELESS	
Antenna	Internal antenna, 3 dBi
Frequency band / channel bandwidth	5GHz, 20MHz / 40MHz / 80MHz channels
Latency	About 100 ms
Network integration mode	Point-to-point link to the ZT-526 receiver
Transmission range (LOS)	98ft (30m), line of sight
USB peripheral and touch back	USB camera and audio pass-back for conferencing, USB touch-back to the presenting device

Specifications (cont.)

WIRELESS (CONT)	
Wireless data rate	Up to 1200Mbps
Wireless security	AES 128-bit content encryption
Wireless standard	802.11ac

GENERAL / PHYSICAL	
Certifications	FCC, CE, RoHS
Dimensions / net weight	70.2 g, 60 x 60 x 15 mm
Housing	Metal
In the Box	Presentation sender
Indicators	Status LED
Limited warranty	5 years
Operating / storage humidity	0% to 80% RH operating / 5% to 90% RH storage
Operating / storage temperature	Operating -10°C to 40°C / storage -10°C to 60°C

POWER	
PoE standard	Not supported
Power consumption (max)	5W
Power supply	USB-C, 5V DC

ADDITIONAL	
Dual display output	2x HDMI outputs on the receiver
Touch back and USB conferencing	Room touch display, camera and microphone reach the presenting laptop through the dongle