

IP2P



PoE IP Camera Extender Over Coax

Model: IP2P Extender is designed to send and extend IP or POE camera or any TCP/IP 10/100BaseT devices over existing coax cable. The distance can be up to 590 feet (180 meters) by RG6U 75Ω Coaxial Cable. They are completely transparent to protocols, codes, and applications ensuring compatibility with any IP, POE camera and its management software. It is the perfect solution for sending IP Video links and Power to remote camera installation that are beyond the 100 meters distance limit of Ethernet.

Features:

- Extend IP / PoE camera or any TCP/IP device over existing coaxial cable
- Max range up to 590 feet (180 meters) over RG6 75Ω Coaxial Cable, 410 feet (125 meters) over RG59.
- Ability to send power over coax to IP / PoE camera DC5V, DC12V)
- Support 10/100BASE-T transmission rate
- Built in LED status indication

Panel View:

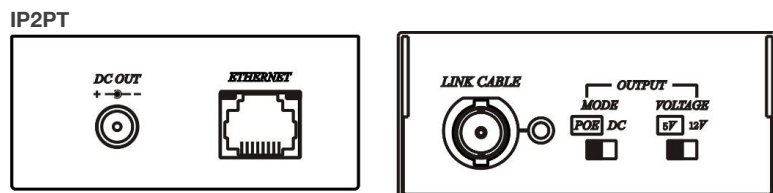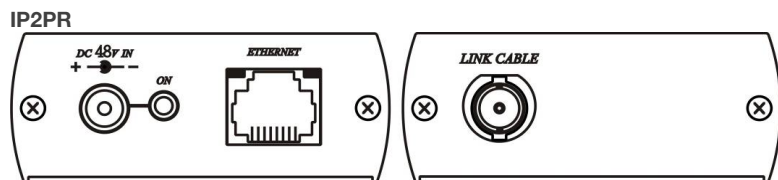

Connection:


IP2PT connect coax cable to link cable BNC connection. Plug IP camera into Ethernet port. Leave output switch on POE.
 IP2PR connect coax cable to link cable BNC connection. Plug Cat5 patch cable from Ethernet port into network switch or router. Then plug included 48V power supply into DC 48V in jack.
 Link Cable lights by coax connections should be on once power is plugged in.
 After a few seconds you should see the ethernet lights on. At this point search for your IP camera with appropriate tools.

NOTE: If you do not want to use POE Mode and just want standard 12V or 5V on the DC OUT jack of IP2PT then change IP2PT mode switch to DC and Voltage switch to 5V or 12V pending your required output voltage needs. Most standard cameras require 12V power so they can be power with included cable this way.

Package Contents:

- IP2PT X 1
- IP2PR X 1
- DC48V power adapter X 1
- Power adapter cables
- Screw pack

Application:

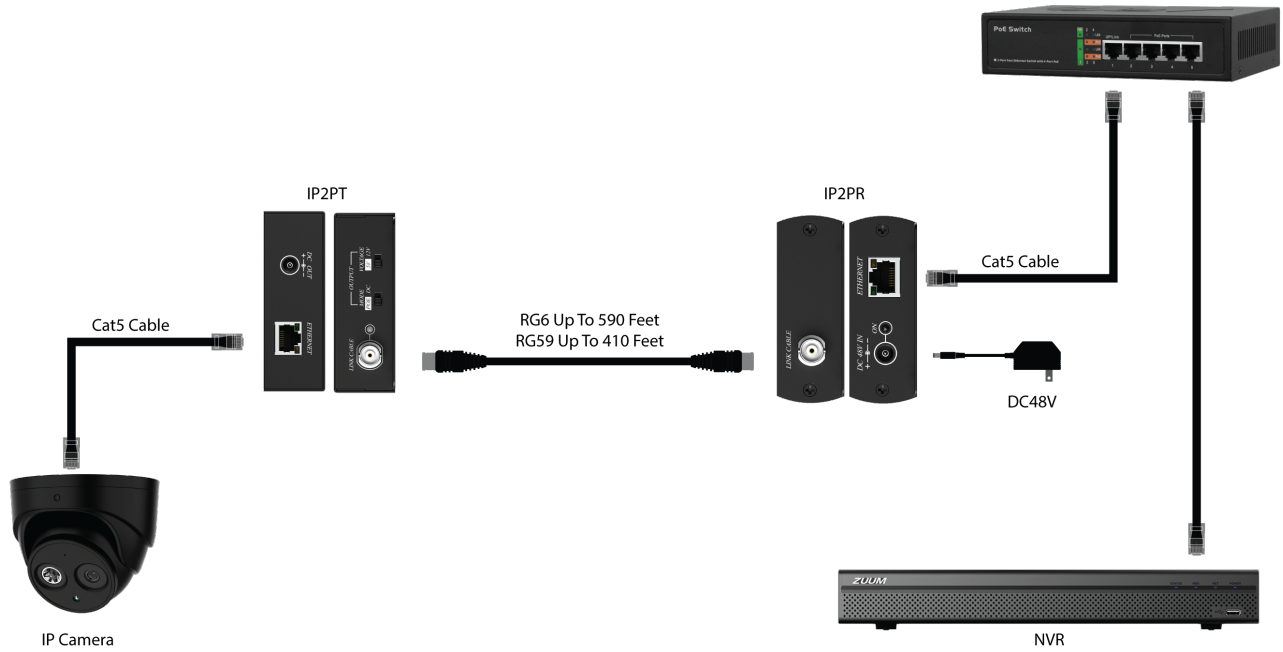

Do you Need Technical Support?

ZUUM is proud to offer free technical support to ensure your product is operating correctly.

If you are experiencing difficulties setting up this product, please call us for assistance 1-888-861-7351 or visit www.zuum.life

