


Surveillance Monitoring Pole

Three-section pole for surveillance cameras, lighting, and outdoor equipment installations

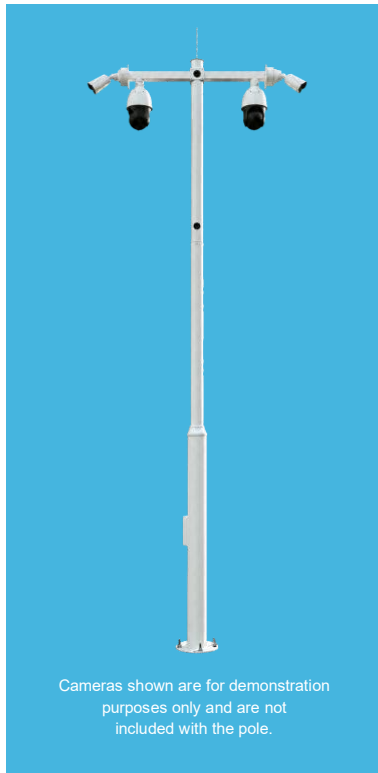

- Three-section surveillance monitoring pole
- 12 ft assembled height with three 4 ft sections
- Laser-cut and integrally welded SGCC round-tube construction
- Includes a steel cage frame for concrete foundation installation
- Hot-dip galvanized and spray-painted for corrosion resistance
- Supports street, courtyard, parking-area, and sports-venue lighting
- Supports cameras and equipment boxes

PRODUCT INFORMATION

PARAMETER	SPECIFICATION
Type	Three-section surveillance monitoring pole
Material	High-quality SGCC
Assembled height	12 ft (3.66 m)
Section configuration	3 sections, 4 ft (1.22 m) per section
Top and extension pole	2.9 in (74 mm) diameter; 0.06 in (1.5 mm) wall thickness
Base pole	4.48 in (114 mm) diameter; 0.08 in (2.0 mm) wall thickness
Color	White
Pole surface	Hot-dip galvanized with spray-painted finish
Wind resistance capability	67 mph (30 m/s)
Pole shape	Circular, tapering profile
Weatherproof cover	1 piece
Lightning arrester	1 piece
Camera mounting brackets	4
Packaged size and weight	51 x 13 x 11 in; 50 lb (22.7 kg)
Working temperature	-40°F to 176°F (-40°C to 80°C)