

BM4TP-HD

HD CVI/TVI/AHD Camera Twisted Pair Cat5/6 Passive Video Extender

Transmit HD cameras like the ZUUM TVI cameras over 1 pair of Cat5/6 wire. Screw terminal on one side and 4" cable on the other side making it easier to connect to the back of our TVR. Can reach 1080P resolutions up to 820' (250m) for TVI cameras and further for CVI and AHD.


Features:

- Send HD CVI/TVI/AHD camera video up to 1,312' (400m) over Cat5/6 cable
- Send HD TVI camera video up to 820' (250m)
- BNC male to screw terminal with 4" mini coax cable for easy connection
- Small form factor easier to mount multiples behind TVR, Quads, Multiplexer
- Passive, no power required
- Built in ESD, EFT (impulse noise) and transient protection

Package Includes:

BM4TP-HD x 1 piece
Instructions

Panel View:

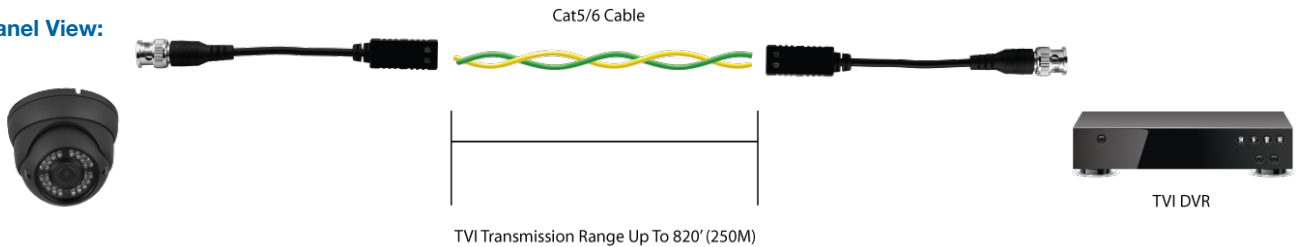

Specification:

Model:	BM4TP-HD
Input Video Signal	BNC Male (1.0 volt P-P, 75Ω)
Output Video Signal	Terminal Block
Bandwidth	50 ~ 60Mhz (-3dB)
Transmission Distance	720P: CVI 1312', AHD 1312', TVI 820' 1080P: CVI 1312', AHD 820', TVI 820'
ESD Protection	30 KV (air), 15 KV (contact), IEC 61000-4-2 compliant
EFT Protection	40A (5/50-ns) ; IEC 61000-4-4 compliant
Lightning Protection	2A (8/20μs) ; IEC 61000-4-5 compliant
Surge Protection	< 1 nS
Temperature	Operation: 32 to 131°F, Storage: -4 to 185°F (Humidity: up to 95%)
Dimensions	.57"(w) .61"(h) 5.70"(l)
Weight – lbs	.04



Do you Need Technical Support?

ZUUM is proud to offer free technical support to ensure your product is operating correctly. If you are experiencing difficulties setting up this product, please call us for assistance 1-888-861-7351 or visit

www.zuum.life
Here for You 24/7