

BMTP-HD

HD CVI/TVI/AHD Camera Twisted Pair Cat5/6 Passive Video Extender

Transmit HD cameras like the ZUUM TVI cameras over 1 pair of Cat5/6 wire. Screw terminal on one side and BNC connector on the other side making this a very small balun. Can reach 1080P resolutions up to 820' (250m) for TVI cameras and further for CVI and AHD.


Features:

- Send HD CVI/TVI/AHD camera video up to 1,312' (400m) over Cat5/6 cable
- Send HD TVI camera video up to 820' (250m)
- BNC male to screw terminal for easy connection
- Small form factor easier to mount multiples behind TVR, Quads, Multiplexer
- Passive, no power required
- Built in ESD, EFT (impulse noise) and transient protection

Package Includes:

BMTP-HD x 1 piece
Instructions

Panel View:

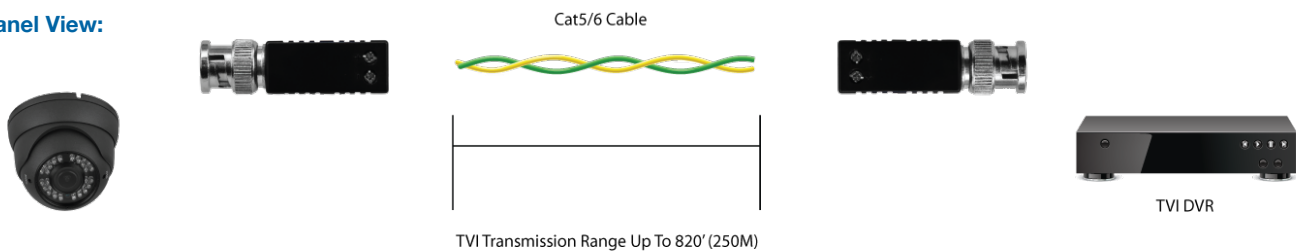

Specification:

Model:	BMTP-HD
Video Input	BNC Male (75Ω 1.0 volt p-p)
Video Output	Terminal Block
Bandwidth	50 ~ 60Mhz (-3dB)
Transmission Distance	720P: CVI 400M, AHD 400M, TVI 250M 1080P: CVI 400M, AHD 250M, TVI 250M
ESD	30 KV (air), 15 KV (contact), compliant IEC 61000-4-2
EFT (impulse noise)	40A (5/50-ns) ; compliant IEC 61000-4-4
Lightning Protection	2A (8/20μs) ; compliant IEC 61000-4-5
Surge Protection Startup Time	< 1 nS
Environmental Specifications	Operation: 32 to 131°F, Storage: -4 to 185°F (Humidity: up to 95%)
Dimensions	.57"(w) .61"(h) 1.95"(l)
Weight – lbs	.04



Do you Need Technical Support?

ZUUM is proud to offer free technical support to ensure your product is operating correctly. If you are experiencing difficulties setting up this product, please call us for assistance 1-888-861-7351 or visit www.zuum.life
Here for You 24/7